


2MBI400U2B-060

IGBT Module U-Series 600V / 400A 2 in one-package

Equivalent Circuit Schematic

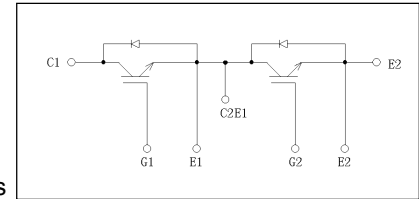

Features

- High speed switching
- Voltage drive
- Low inductance module structure

Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply
- Industrial machines, such as Welding machines

Maximum ratings and characteristics

Absolute maximum ratings (at $T_c=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Conditions	Rating	Unit	
Collector-Emitter voltage	V_{CES}		650	V	
Gate-Emitter voltage	V_{GES}		± 20	V	
Collector current	I_c	Continuous	400	A	
	I_{cp}	1ms	800		
	$-I_c$		400		
	$-I_c$ pulse		800		
Collector Power Dissipation	P_c	1 device	1250	W	
Junction temperature	T_j		+150	$^\circ\text{C}$	
Storage temperature	T_{stg}		-40 to +125		
Isolation voltage	between terminal and copper base *1	V_{iso}	AC:1min.	2500	VAC
Screw Torque	Mounting *2			3.5	N·m
	Terminals *2			3.5	

*1 : All terminals should be connected together when isolation test will be done.

*2 : Recommendable value : Mounting 2.5 to 3.5N·m(M5), Terminal 2.5 to 3.5 N·m(M5)

Electrical characteristics (at $T_j=25^\circ\text{C}$ unless otherwise specified)

Item	Symbols	Conditions	Characteristics			Unit	
			Min.	Typ.	Max.		
Zero gate voltage collector current	I_{CES}	$V_{GE}=0V, V_{CE}=600V$	-	-	2.0	mA	
Gate-Emitter leakage current	I_{GES}	$V_{CE}=0V, V_{GE}=\pm 20V$	-	-	400	nA	
Gate-Emitter threshold voltage	$V_{GE(th)}$	$V_{CE}=20V, I_c=400mA$	6.2	6.7	7.7	V	
Collector-Emitter saturation voltage	$V_{CE(sat)}$ (terminal)	$V_{GE}=15V, I_c=400A$	$T_j=25^\circ\text{C}$	-	2.25	2.55	V
			$T_j=125^\circ\text{C}$	-	2.50	-	
	$V_{CE(sat)}$ (chip)		$T_j=25^\circ\text{C}$	-	1.85	-	
			$T_j=125^\circ\text{C}$	-	2.10	-	
Input capacitance	C_{ies}	$V_{CE}=10V, V_{GE}=0V, f=1MHz$	-	29	-	nF	
Turn-on time	t_{on}	$V_{CC}=300V$	-	0.40	1.20	μs	
	t_r	$I_c=400A$	-	0.22	0.60		
	$t_{r(i)}$	$V_{GE}=\pm 15V$	-	0.16	-		
Turn-off time	t_{off}	$R_G=6.8\ \Omega$	-	0.48	1.20	μs	
	t_f		-	0.07	0.45		
Forward on voltage	V_F (terminal)	$V_{GE}=0V, I_F=400A$	$T_j=25^\circ\text{C}$	-	2.00	2.35	V
			$T_j=125^\circ\text{C}$	-	2.05	-	
	V_F (chip)		$T_j=25^\circ\text{C}$	-	1.60	-	
			$T_j=125^\circ\text{C}$	-	1.65	-	
Reverse recovery time	t_{rr}	$I_F=400A$	-	-	0.35	μs	
Lead resistance, terminal-chip*3	R lead		-	0.97	-	m Ω	

*3:Biggest internal terminal resistance among arm.


Thermal resistance characteristics

Items	Symbols	Conditions	Characteristics			Unit
			Min.	Typ.	Max.	
Thermal resistance	$R_{th(j-c)}$	IGBT	-	-	0.10	$^\circ\text{C/W}$
	$R_{th(j-c)}$	FWD	-	-	0.16	$^\circ\text{C/W}$
Contact Thermal resistance	$R_{th(c-f)}$ *4	With thermal compound	-	0.025	-	$^\circ\text{C/W}$


*4 : This is the value which is defined mounting on the additional cooling fin with thermal compound.

■ Characteristics (Representative)


Collector current vs. Collector-Emitter voltage (typ.)
Tj= 25°C / chip

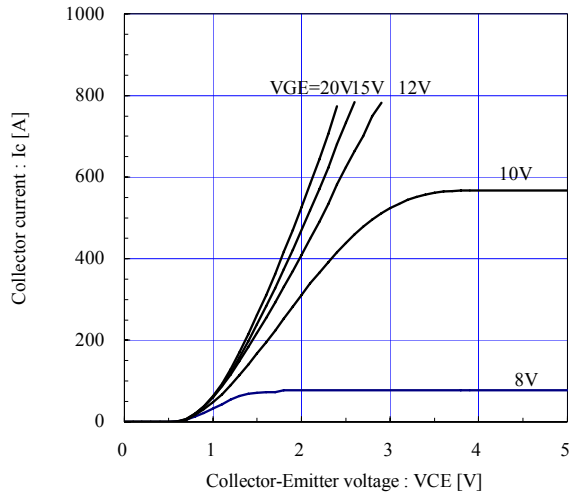


Collector current vs. Collector-Emitter voltage (typ.)
Tj= 125°C / chip

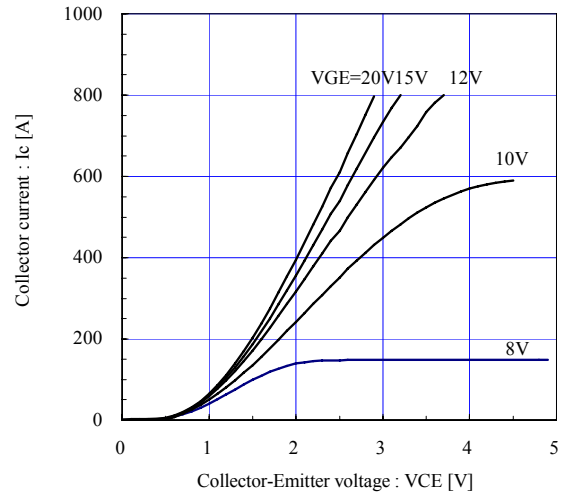


Collector current vs. Collector-Emitter voltage (typ.)
VGE=15V / chip

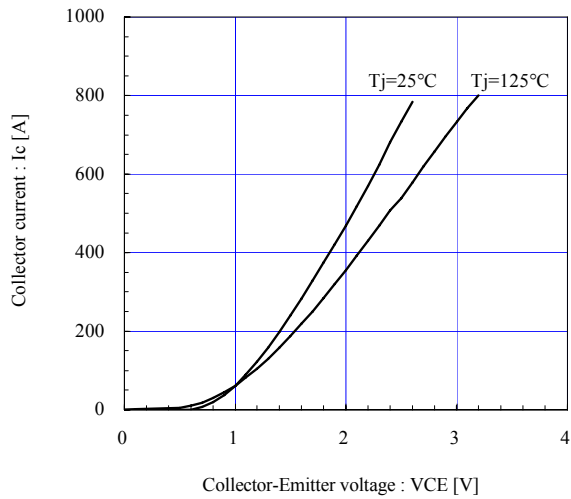


Collector-Emitter voltage vs. Gate-Emitter voltage (typ.)
Tj=25°C / chip

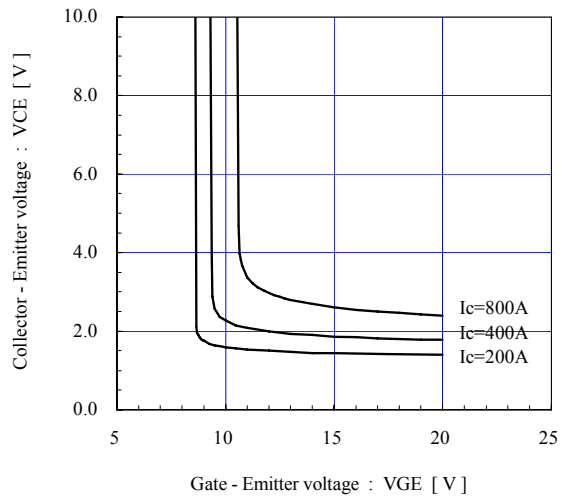


Capacitance vs. Collector-Emitter voltage (typ.)

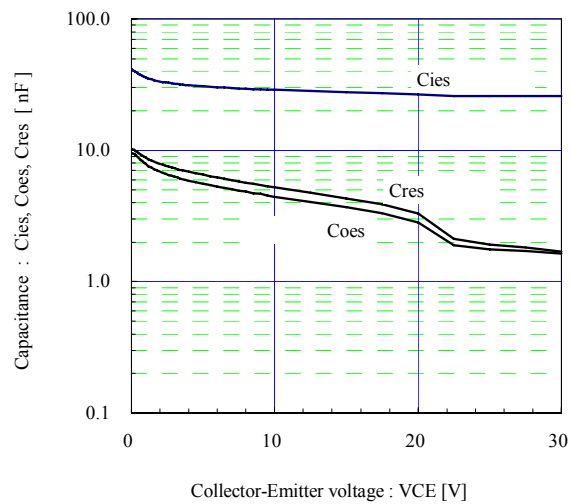


Dynamic Gate charge (typ.)
Vcc=300V, Ic=400A, Tj= 25°C

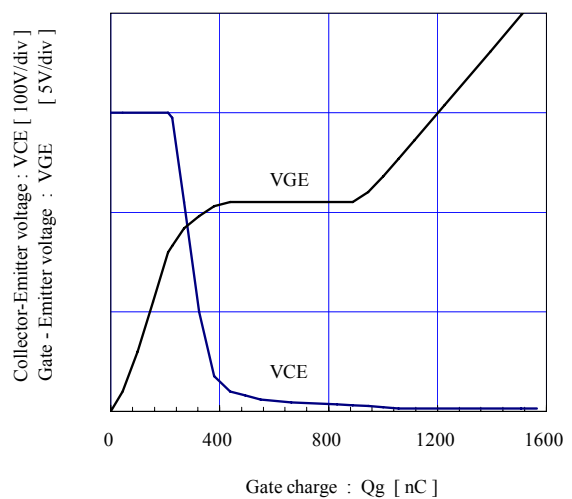


Switching time vs. Collector current (typ.)
 $V_{cc}=300V, V_{GE}=\pm 15V, R_g=6.8\Omega, T_j=25^\circ C$

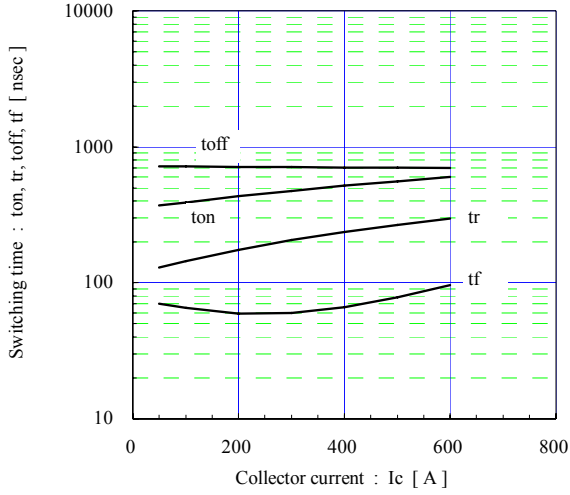


Switching time vs. Collector current (typ.)
 $V_{cc}=300V, V_{GE}=\pm 15V, R_g=6.8\Omega, T_j=125^\circ C$

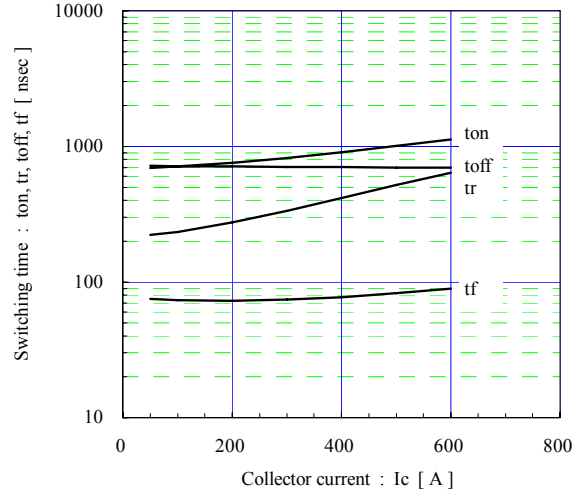


Switching time vs. Gate resistance (typ.)
 $V_{cc}=300V, I_c=400A, V_{GE}=\pm 15V, T_j=25^\circ C$

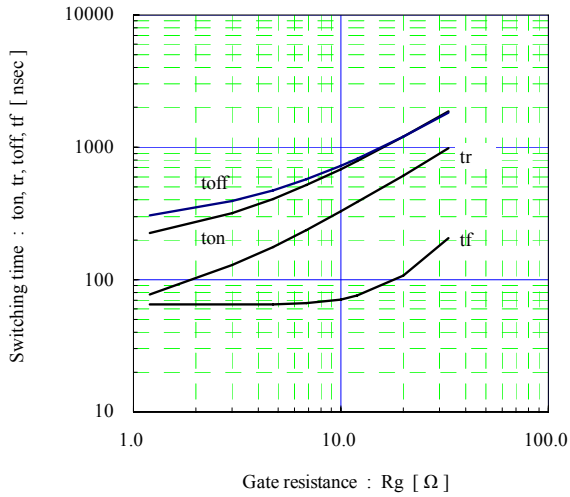


Switching loss vs. Collector current (typ.)
 $V_{cc}=300V, V_{GE}=\pm 15V, R_g=6.8\Omega$

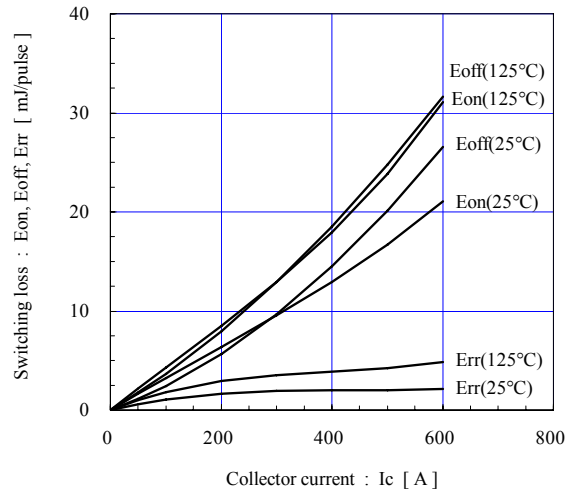


Switching loss vs. Gate resistance (typ.)
 $V_{cc}=300V, I_c=400A, V_{GE}=\pm 15V, T_j=125^\circ C$

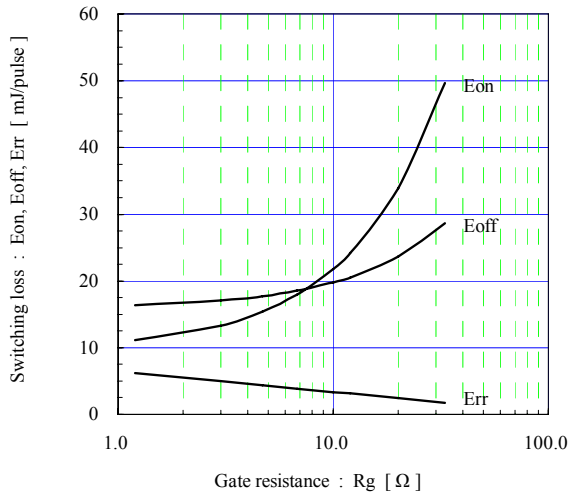


Reverse bias safe operating area (max.)
 $+V_{GE}=15V, -V_{GE} \le 15V, R_g \ge 6.8\Omega, T_j \le 125^\circ C$

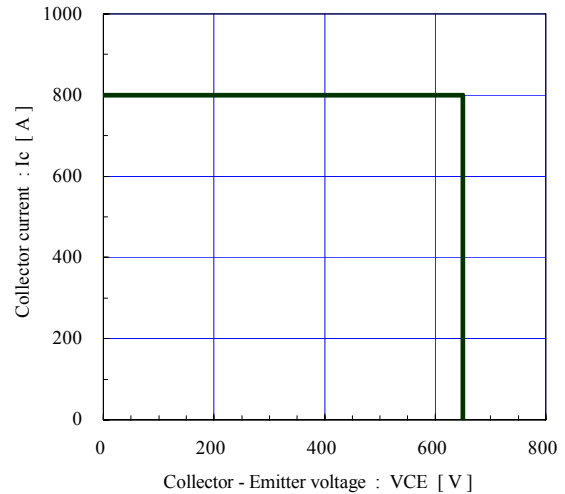


Forward current vs. Forward on voltage (typ.)
chip

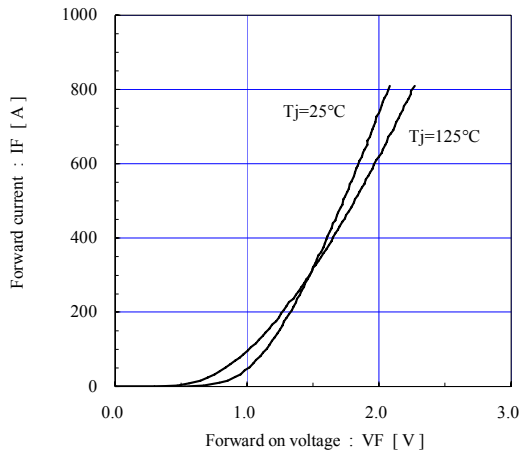

Reverse recovery characteristics (typ.)
Vcc=300V, VGE=±15V, Rg=6.8Ω

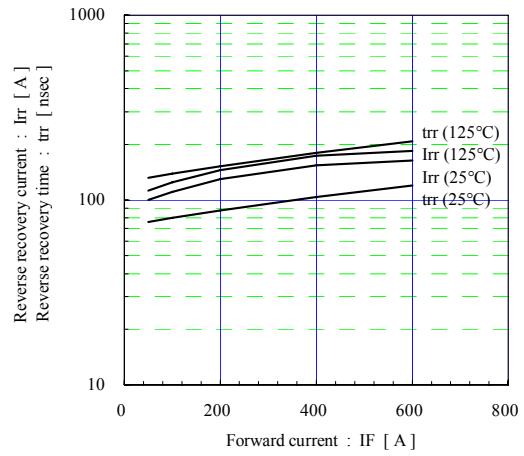

Transient thermal resistance (max.)

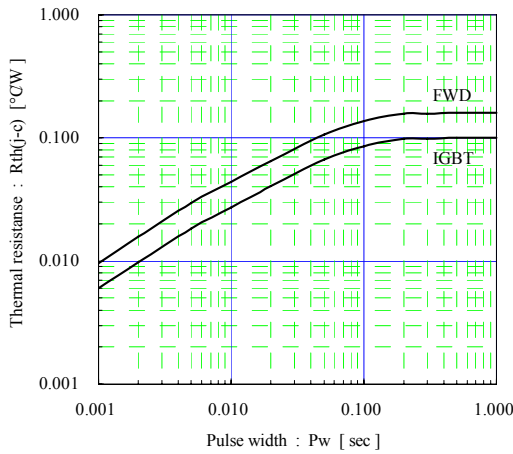

■ Outline Drawings, mm

M233

